



INSTITUTE FOR SOCIAL AND ECONOMIC CHANGE
Dr V.K.R.V Rao Road Nagarbhavi P.O, Bengaluru-560 072

**"NOTIFICATION FOR INVITING QUOTATION FOR CONSTRUCTION OF
SHED FOR DB PANEL BOX AT ISEC"**

28.08.2024

Ref: ISEC/Estate/DBPanelShed/2024-2025/ 433

**Sub: Request for Quotation of Construction of Shed for DB Panel Box
at ISEC**

Dear Sir/Madam,

1. Enclosed herewith is the quotation format for construction of Shed for DB Panel Box at ISEC.

2. In case you are interested, please submit your quotation as per the specification given in the enclosed form in sealed envelope addressed to the Registrar on or before 13th September 2024, 5:00pm. The Envelope should be Superscribed as **"Quotation for Construction of Shed for DB Panel at ISEC"**.

Thanking you,

Yours Sincerely,

S. Padmavathi
28/8/24

Registrar (i/c)

Registrar
Institute for Social Economic Change
Dr. V.K.R.V Rao Road, Nagarabhavi P.O.,
Bengaluru-560 072, Karnataka (India)
Ph: (O) 080-23217011 Email: registrar@isec.ac.in

To be filled and submitted in this copy only

Date:

To

The Registrar

Institute for Social and Economic Change

Dr. V K R V Rao Road, Nagarabhavi, Bengaluru -560 072.

Ref: ISEC/Estate/DBPanelshed/2024-2025/

Dear Sir,

Sub: Request for quotation of Construction of Shed for DB Panel Box at ISEC

The details specification given below:

SL. No	Work Description	Qty	Rate per Unit Qty	Amt (Rs.)
1	Providing, fabricating, assembling, hoisting/ erecting and fixing in position at all heights/ all levels/ all floors/ all shapes & sizes with all leads & lifts using MS Rolled Steel Sections, Hollow/ Tubular sections, all type of sheet/ plate, Bright Bars, deep threaded MS bolts, threaded J bolts, insert plate, support plate etc as per drawing. All confirming to latest relevant IS codes for the work of steel structures like built-up section, staircases, railings, handrail, jali, gates, grills, bracings, grating, corner guard, platforms, brackets, monkey ladder, cattle trap, pipe rack, rungs, false ceiling frame work, Roof canopy, fencing posts, frame work for Screen/ facade etc. including straightening, cutting, bending, bolting and welding the members all as per structural drawings and as per kg detailed specifications (for materials & workmanship) including necessary scaffolding/ staging etc. complete in the situations. a. Profile Cutting of components to required length/ width and shape/ profile; b. Smooth grinding/ machining of edges/ faces/ all welding joints;	550kg		

	c. Necessary welding (electric arc welding) for required weld lengths and sizes. d. Machine drilling of holes for joining/anchoring. The rate shall include dry sanding, degreasing (wet cleaning) & preparation of rust-free surface manually or mechanically, metal putty to make the surface even and smooth, 2 coat zinc chromate yellow oxide primer and 2 coat of enamel paint of approved shade of paint over all the surfaces of the steel sections or as specified in the drawing. (Standard measurements will be paid for as actual cut length used at site). e. Rate shall be inclusive for the cost of anchor fastner, nut, bolt, accessories etc for fixing the elements. Approved Make: TATA/ Jindal/ Asian or equivalent ISI marked			
2	Providing and Fixing Roofing sheet – GI powder coated 0.5mm Approved Make: ISI approved	264 Sq. ft		
3	Construction of Foundation (M20 Grade) for the Size of 1' x 1' x 2"	0.4 Cu.m		
4	Any Others Charges			
			GST @	
			Total	

Note:

1. Item to be supplied at ISEC along with proper installation and warranty/guaranty to be provided as per company/manufacture norms
- 2.No advance will be paid.
3. The drawing along with dimension & specification are enclosed.
4. Payment will be paid as per Qty executed at site.
5. Along with the quotation, the contractor should attach a copy of the GST certificate.


Thanking you

Yours faithfully

(Authorized Signatory with company Name & Seal)

Construction of Shed for DB Panel at ISEC

Side View

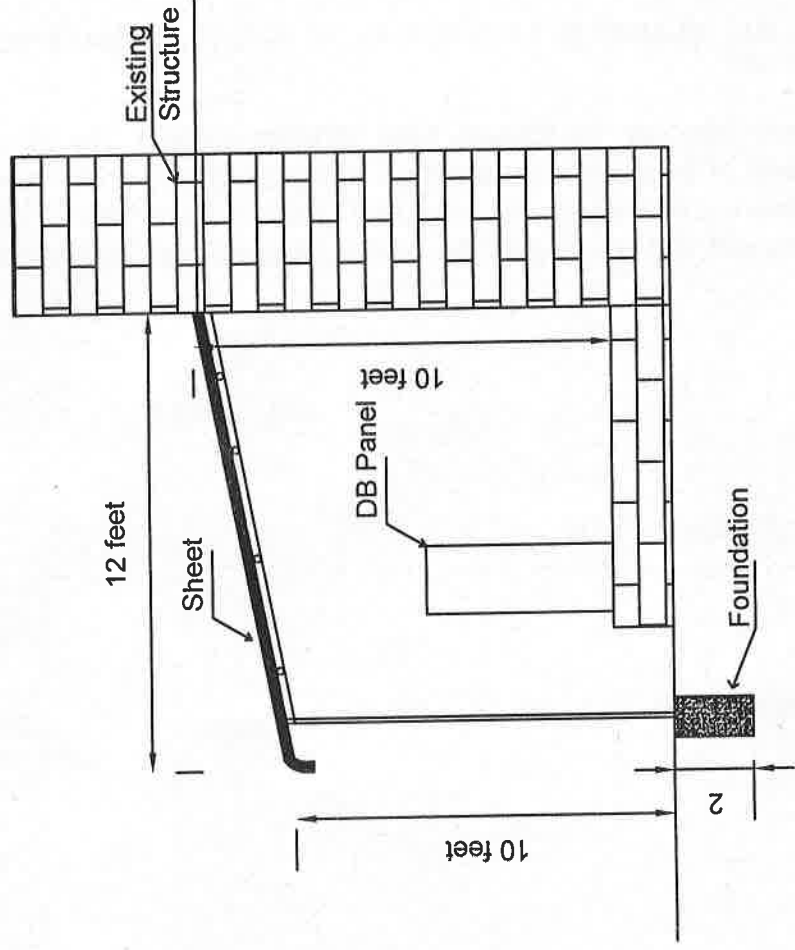

Front View

